

Compliance with Standards



FAA: AC 150/5345-46, AC 150/5345-42 AC 150/5345-42G Chinese National Standard: GB/T 7256-2005

Application/Use

Installation of 12-inch in-pavement lighting fixtures, or installation of 8-inch in-pavement lighting fixtures with 12"/8" adaptor ring

Features

- Stretch forming with high quality aluminum alloy;
- Special material formula, excellent thermal conductivity;
- Reasonable structure design, uniformly forced, not easy to deformation;
- Drawing process makes interior structure of material denser, good mechanical performance;
- High precision machining, to ensure overall quality and precision of shallow base;
- Antiseptic treatment on surface with good anti-corrosion property, more durable;
- Premium metal water joint, good waterproofing;
- Screw holes with stainless steel thread sleeve, in order to prevent aluminum alloy threaded hole from loosing;
- Two openings bi-directionally and double openings in single direction, easy to install;
- Enough large space, to protect internal cable from squashing by light;
- · Solid material, to ensure shallow base long-term and reliable use after embedding into pavement.


Order Information




Wiring Pattern -

- S = side entry
- B = Bottom entry
- Note: other wiring patterns ordered upon request






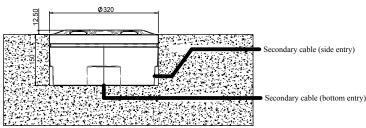

Dimensions

Net Weight: 6.62kg Packing: 330*330*180 mm3 Order reference: 927151 (for bottom entry type) 927152 (for side entry type)



1 1